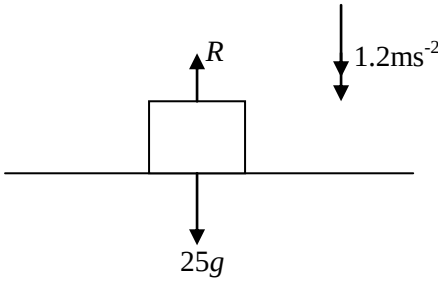


M1


Q	Solution	Mark	Notes
1(a)			
	Apply N2L to crate	M1	R and $25g$ opposing. Dim. Correct
	$25g - R = 25 \times 1.2$	A1	correct equation
	$R = \underline{215 \text{ (N)}}$	A1	Any form
1(b)	$R = 25g = \underline{245 \text{ (N)}}$	B1	

Q	Solution	Mark	Notes
2(a)	Use of $v = u + at$ with $u=10, v=24, t=21$ $24 = 10 + 21a$ $a = \frac{2}{3} (\text{ms}^{-2})$	M1 A1 A1	oe accept anything derived from $\frac{2}{3}$ rounded correctly
2(b)	$s = \frac{1}{2}(u + v)t$ with $v=0, u=24, t=16$ $s = \frac{1}{2} \times 24 \times 16$ $s = \underline{192 \text{ (m)}}$	M1 A1 A1	oe
2(c)		B1 B1 B1 B1	(0, 10) to (21, 24) (21, 24) to (21+T, 24) (21+T, 24) to (37+T, 0) all labels, units and shape.
2(d)	Area under graph = 15000 $0.5(10+24)21 + 24T + 192 = 15000$ $24T = 14451$ $T = \underline{602(.125)}$	M1 A1 B1 A1	used ft (b) $0.5(10+24)21$ or $24T$ Ft graph Accept 600 from correct working. Cao.

Q	Solution	Mark	Notes
3(a)	Resolve perpendicular to plane $R = mg \cos \alpha$ $F = \mu mg \cos \alpha$ $F = 0.6 \times 7 \times 9.8 \times \frac{4}{5}$ $F = \underline{32.9(28 \text{ N})}$	M1 m1 A1	sin/cos correct expression Accept rounding to 32.9.
3(b)	Apply N2L to A $T + mg \sin \alpha - F = 7a$ $T + 41.16 - 32.928 = 7a$ $T + 8.232 = 7a$ Apply N2L to B $3g - T = 3a$ $3g + 8.232 = 10a$ $a = \underline{3.7(632 \text{ ms}^{-2})}$ $T = \underline{18.1(104 \text{ N})}$	M1 A1 M1 A1 m1 A1 A1	dim correct equation Friction opposes motion 4 terms. Accept cos. ft (a) dim correct equation one variable eliminated Dep on both M's cao cao


Q	Solution	Mark	Notes
---	----------	------	-------

4.

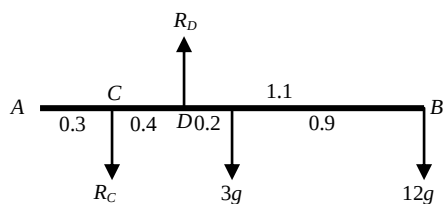


	B1	any 1 correct moment.
Take moments about C	M1	dim correct equation. oe
$0.4R_D = 3g \times 0.6 + 12g \times 1.5$	A1	correct equ any form
$0.4R_D = 19.8g = 194.04$	A1	cao
$R_D = 49.5g = \underline{485.1 \text{ (N)}}$		
Resolve vertically	M1	equation attempted. Or 2 nd moment equation.
$R_D = R_C + 15g$	A1	
$R_C = 34.5g = \underline{338.1 \text{ (N)}}$	A1	cao
<u>Alternative solution</u>		
Moment equation about A/centre/B	M1	
Correct equation	B1	
Second moment equation	M1	
Correct equation	A1	
Correct method for solving simultaneously	m1	Dep on both M's
$R_C = 34.5g = \underline{338.1 \text{ (N)}}$	A1	cao
$R_D = 49.5g = \underline{485.1 \text{ (N)}}$	A1	cao

Q	Solution	Mark	Notes
5(a)	Resolve perpendicular to motion $20\sin 60 + T\sin 30 = 28\sin 60$ $20\frac{\sqrt{3}}{2} + T \times \frac{1}{2} = 28\frac{\sqrt{3}}{2}$ $T = \underline{8\sqrt{3}}$	M1 A1 A1	equation, sin/cos convincing
5(b)	N2L in direction of motion $20\cos 60 + T\cos 30 + 28\cos 60 - 16 = 80a$ $20 \times \frac{1}{2} + 8\sqrt{3} \times \frac{\sqrt{3}}{2} + 28 \times \frac{1}{2} - 16 = 80a$ $a = \underline{0.25 \text{ (ms}^{-2}\text{)}}$	M1 A2 A1	dim correct all forces and No extra force -1 each error cao
5(c)	N2L $-16 = 80a$ $a = -0.2$ Use of $v = u + at$, $v=4$, $u=12$, $a=(+/-)0.2$ $4 = 12 - 0.2t$ $t = \underline{40 \text{ (s)}}$	M1 A1 m1 A1 A1	no extra force accept +/- ft if $a < 0$ ft if $a < 0$

Q	Solution	Mark	Notes
6(a)	 Conservation of momentum $2 \times 3 - 7 \times 5 = 3v_A + 7v_B$ $3v_A + 7v_B = -29$ Restitution $v_B - v_A = -0.6(-5 - 2)$ $v_B - v_A = 4.2$ $-7v_A + 7v_B = 29.4$ $3v_A + 7v_B = -29$ $10v_A = -58.4$ $v_A = \underline{(-)5.84}$ $v_B = \underline{(-)1.64}$	M1 equation required Only one sign error. Ignore common factors A1 M1 v_B, v_A opposing consistent with diagram, +/-7 with the 0.6. A1 m1 one variable eliminated. Dep on both M's. A1 cao A1 cao	
6(b)	Impulse = change of momentum $I = 7v_B - 7(-5)$ $I = -11.48 + 35$ $I = \underline{23.52 \text{ (Ns)}}$	M1 used A1 ft their v_A or v_B	
6(c)	$3.65 = e(5.84)$ $e = \underline{0.625}$	B1 ft v_A if > 3.65.	

Q**Solution****Mark****Notes**

7.



Resolve horizontally

$$T_{AB} \sin 60 = T_{AC} \sin 45$$

$$\frac{\sqrt{3}}{2} T_{AB} = \frac{1}{\sqrt{2}} T_{AC}$$

$$T_{AB} = \sqrt{\frac{2}{3}} T_{AC}$$

Resolve vertically

$$T_{AB} \cos 60 + T_{AC} \cos 45 = 9g$$

$$T_{AB} + \sqrt{2} T_{AC} = 18g$$

$$\sqrt{\frac{2}{3}} T_{AC} + \sqrt{2} T_{AC} = 18g$$

$$T_{AC} = \underline{79.078 \text{ (N)}}$$

$$T_{AB} = \underline{64.567 \text{ (N)}}$$

Alternative MethodThird angle $75^\circ/105^\circ$

$$\frac{T_{AB}}{\sin 45} = \frac{9g}{\sin 75}$$

$$T_{AB} = \frac{9g \times \sin 45}{\sin 75}$$

$$T_{AB} = \underline{64.567 \text{ (N)}}$$

$$\frac{T_{AC}}{\sin 60} = \frac{9g}{\sin 75}$$

$$T_{AC} = \frac{9g \times \sin 60}{\sin 75}$$

$$T_{AC} = \underline{79.078 \text{ (N)}}$$

M1 equation, no extra force

A1

M1 equation, no extra force

A1

m1

A1 cao allow 79

A1 cao allow 65

B1

M1 sine rule attempted

A1 si

A1 cao allow 65

M1 sine rule attempted

A1 si

A1 cao allow 79

Q	Solution				Mark	Notes
8(a)	mass	<i>AD</i>	<i>AB</i>			
	<i>ABCD</i>	72	6	3	B1	
	<i>XYZ</i>	12	6	2	B1	
	<i>E</i>	24	3	4		
	<i>F</i>	36	9	4	B1	both <i>E</i> and <i>F</i> correct
	Jewel	120	<i>x</i>	<i>y</i>	B1	masses in correct proportions.
8(a)(i)	Moments about <i>AD</i>				M1	masses and moments consistent.
	$120x + 12 \times 6 = 72 \times 6 + 24 \times 3 + 36 \times 9$				A1	ft table if triangle subt.
	$120x = 756$					
	$x = \frac{63}{10} = \underline{6.3(\text{cm})}$				A1	cao
8(a)(ii)	Moments about <i>AB</i>				M1	masses & moments consistent
	$120y + 12 \times 2 = 72 \times 3 + 24 \times 4 + 36 \times 4$				A1	ft table if triangle subt.
	$120y = 432$					
	$y = \frac{18}{5} = \underline{3.6(\text{cm})}$				A1	cao
8(b)	$PC = 12 - x$					
	$PC = \underline{5.7(\text{cm})}$				B1	ft their <i>x</i> if < 12 .